



DISCOUNT PREPAREDNESS

Water Filtration Assembly Instructions



Water Filter


Step 1 — Drill a hole in the bottom of the top unit and in the middle of the lid of the bottom unit.



Step 2 — Drill a hole for the spigot along the bottom rim of the second unit.



Step 3 — Remove spigot from packaging.

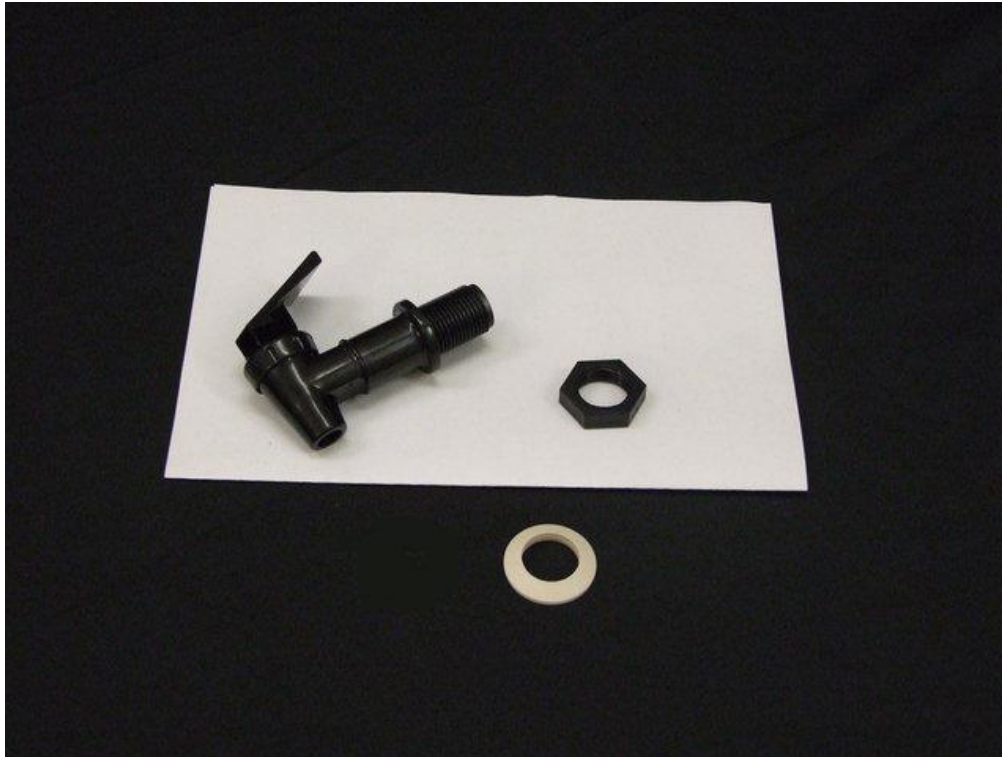

Step 4 — Insert spigot into spigot hole from the outside, using one washer.



Step 5 — In the interior of the unit, screw on wing nut. Hand tighten.



Step 6 — Turn spigot by hand, clockwise, one full rotation (hand tighten only).



Step 7 — Fill unit with water and check for leaks. If leaking occurs, repeat steps 5 and 6.




Step 8 — Remove filter from packaging and wash filter with cold water and cloth or 3m scotchbrite pad.



Step 9 — Put washer on stem of filter.



Step 10 — Insert filter stem through filter hole with filter upright in the plastic reservoir.

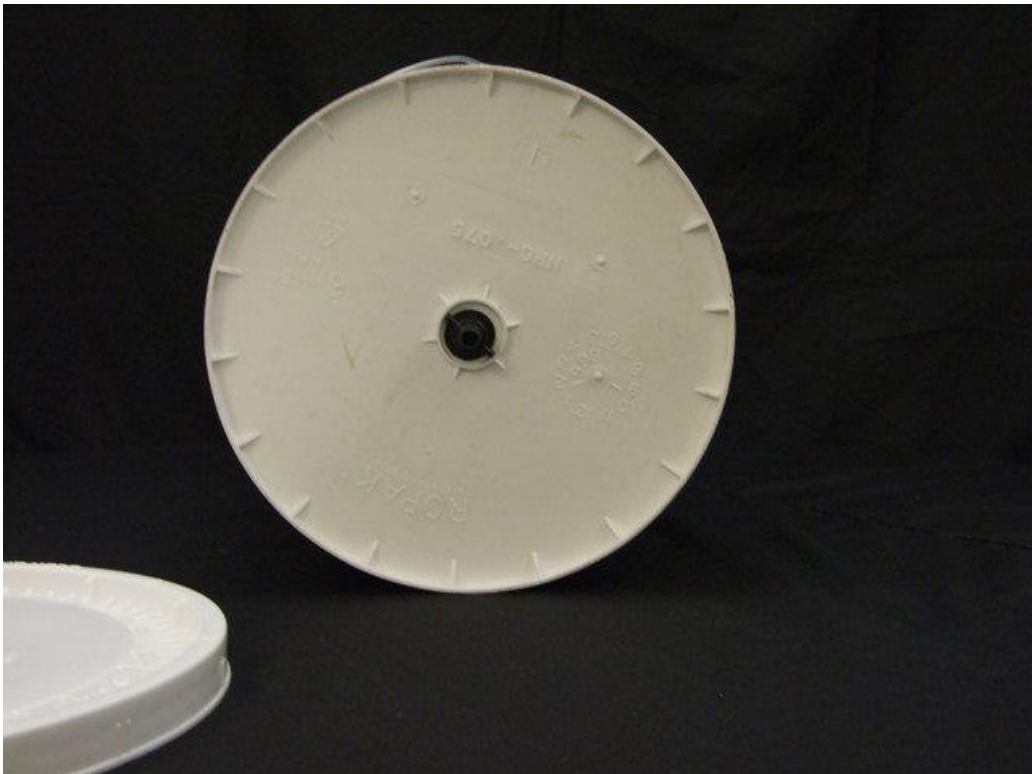

Step 11 — Tighten wing nut on filter stem. If leaking occurs, repeat step 11.

