



# DISCOUNT PREPAREDNESS

---

## Water Filtration Assembly Instructions



Water Filter


**Step 1** — Drill a hole in the bottom of the top unit and in the middle of the lid of the bottom unit.



**Step 2** — Drill a hole for the spigot along the bottom rim of the second unit.



**Step 3** — Remove spigot from packaging.

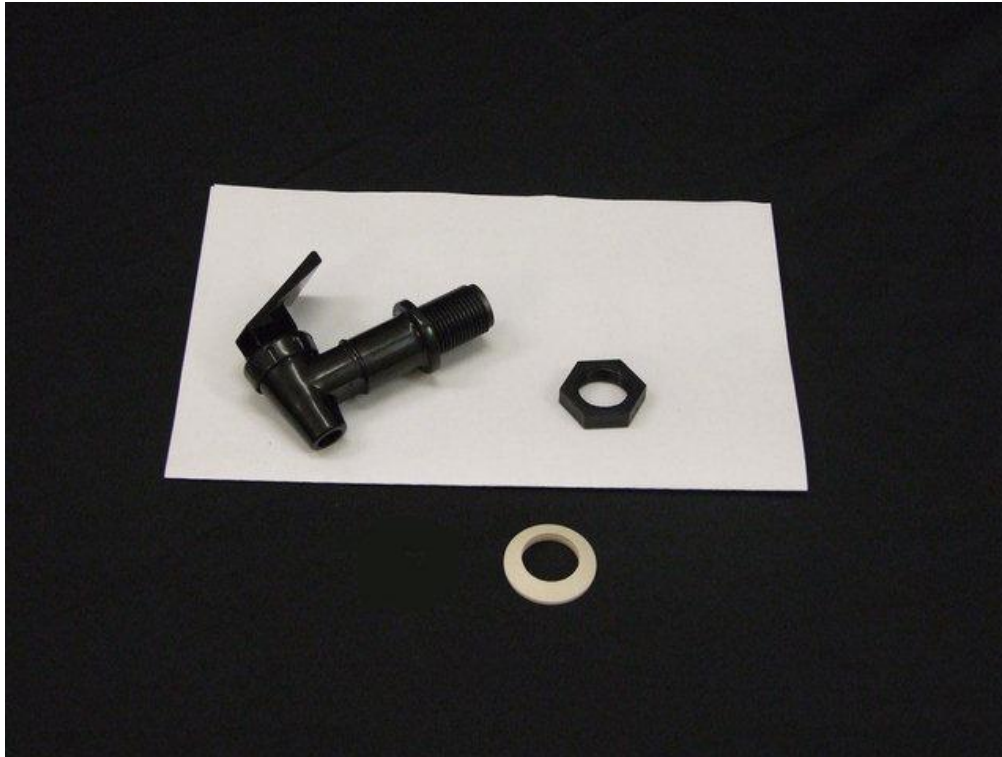

**Step 4** — Insert spigot into spigot hole from the outside, using one washer.



**Step 5** — In the interior of the unit, screw on wing nut. Hand tighten.



**Step 6** — Turn spigot by hand, clockwise, one full rotation (hand tighten only).



**Step 7** — Fill unit with water and check for leaks. If leaking occurs, repeat steps 5 and 6.




**Step 8** — Remove filter from packaging and wash filter with cold water and cloth or 3m scotchbrite pad.



**Step 9** — Put washer on stem of filter.



**Step 10** — Insert filter stem through filter hole with filter upright in the plastic reservoir.

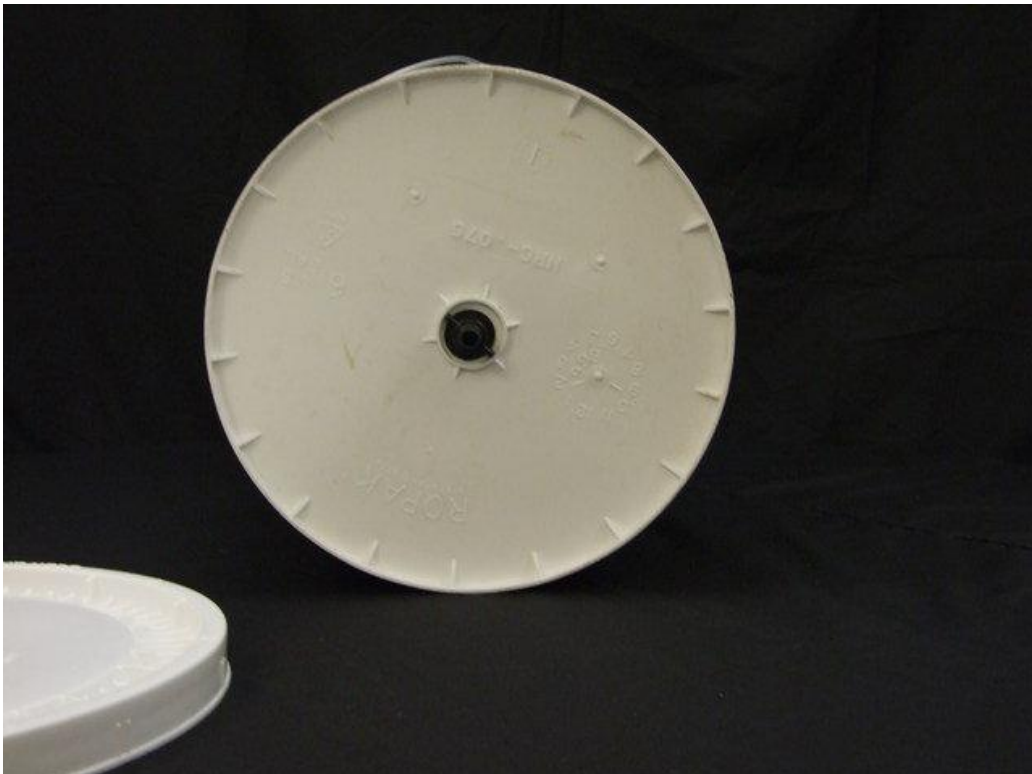

**Step 11** — Tighten wing nut on filter stem. If leaking occurs, repeat step 11.

